

Locking Dust Cap for
Dodge Ram 1500/Rebel Gasoline Trucks

To Install:



- Align the Secure Key over the screw head and slip it on.



- Turn the Secure Key counterclockwise about one revolution raising the head of the Secure Screw above the locking pocket.



- Remove Secure Key.



- Slide the black cap piece outward as pictured.




- Set the black cap piece on top of the filler neck shield, aligning the bottom protrusion onto the relieved flapper.



- Slide the red shell over the black cap piece.



- Reinstall the Secure Key on the head of the screw. Turn the Secure Key clockwise until the screw is lightly tight.

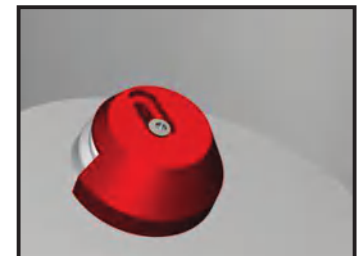

- Locking Dust Cap should be securely installed.

To Remove:



- Align the Secure Key over the screw head and slip it on.



- Turn the Secure Key counterclockwise about one revolution so that head of screw is above the locking pocket in the top.



- Slide the red shell off of the black cap piece.



- Remove the Shel-Loc(TM) from the filler neck.

Lightly tightening the Secure Screw is enough to ensure a secure system and an easy-to-unlock cap for the future.