

DODGE Ram Truck '99-'02



Remove Dashboard Fascia

- There is a small gap at the bottom edge of the dashboard fascia. Carefully (small fingers?) pry the fascia away from the dashboard.
- The dashboard is held in place via “snap fit” clips.
- Note the clip locations.
- To completely remove the fascia, you will have to tilt the steering column and move the automatic transmission selector to first gear (be sure to set the parking brake).

Remove Storage Compartment

- Remove the three Phillip's head screws from the storage compartment.
- Remove the compartment. Save it for later? Throw it away? The choice is yours.

Continued on Next Page ►




If you need more assistance, we are only a phone call away.

(770) 886-2500

Monday-Friday
8:30am-5:30pm EST


GENO'S GARAGE, INC.
1150 Samples Industrial Drive
Cumming, Georgia 30041

Installation: In-Dash Gauge

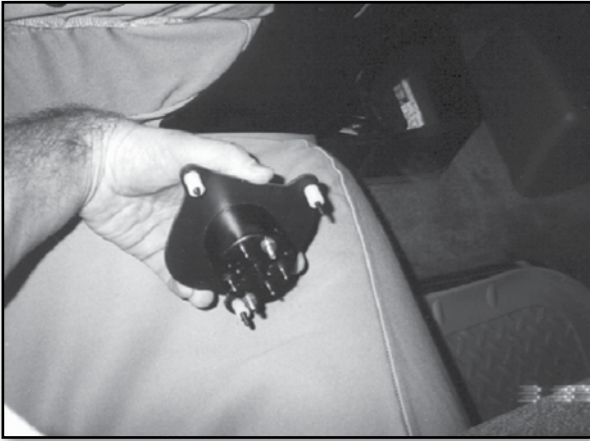

Install Gauge

- Slide your gauge through the new plastic back plate.
- The fit should be tight. If it is too tight you may wish to:
 - Remove identification stickers from the gauge.
 - Sand/trim the plastic backplate.
 - Use a mist of water to lubricate the gauge as you slide it into the back plate
- Pre-position gauge/back plate to the dashboard to assure that upon final installation the gauge is straight.
- Note the spacers and long screws provided for proper spacing.

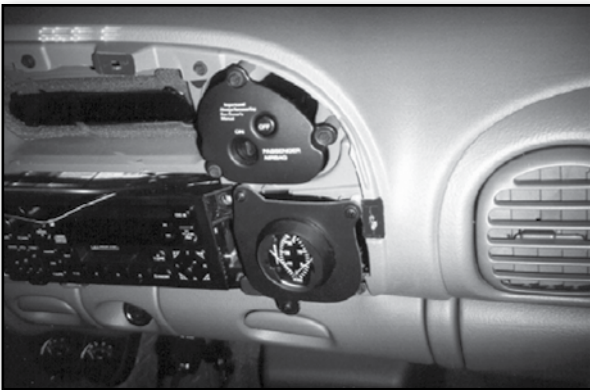

Dashboard Fascia Re-Assembly

- Install gauge into the storage compartment void.
- Before re-assembly of the dashboard fascia, it is a good idea to check the operation of the gauge.
- Reinstall dashboard fascia by pressing the fascia into the snap-fit locations.

